

# DATA SHEET



MODEL SPRE 12 225

VOLTAGE 12V

CAPACITY 225Ah @ 100Hr

MATERIAL Polypropylene

DIMENSIONS Inches (mm)

BATTERY Deep-Cycle Flooded/Advanced Lead Acid Battery

COLOR Maroon

WATERING Single-Point Watering Kit (Optional)

PRODUCT HIGHLIGHTS 8 Years Battery Life Based on IEC 61427



12V

#### **PRODUCT + PHYSICAL SPECIFICATIONS**

Model	Terminal Type <sup>D</sup>	Dimensions <sup>B</sup> Inches (mm)			Weight <sup>E</sup> Lbs. (kg)	HydroLink or SPWK	Handles
		Length	Width	Height <sup>C</sup>			
SPRE 12 225	6	14.97 (380)	6.91 (176)	14.71 (374)	132 (60)	SPWK	Braided Rope

# **ELECTRICAL SPECIFICATIONS**

Voltage	Capacity <sup>A</sup> Amp-Hours (Ah)			Energy (kWh)		
121/	10-Hr	20-Hr	48-Hr	72-Hr	100-Hr	100-Hr
12V	179	204	212	216	225	2.70

# **CHARGING INSTRUCTIONS**

Charger Voltage Settings (at 77°F/25°C)					
System Voltage	12V	24V	48V		
Maximum Charge Current (% of C <sub>20</sub> Rate)*	13%				
Maximum Absorption Phase Time (hours)	4				
Absorption Voltage **	14.70	29.40	58.80		
Float Voltage	13.50	27.00	54.00		
Equalization Voltage	16.20	32.40	64.80		

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.















<sup>\*</sup>If charging time is limited contact Trojan Technical Support for assistance.

<sup>\*\*</sup>In cases where controller has a bulk voltage setting, use absorption voltage setting above.


## **CHARGING TEMPERATURE COMPENSATION**

Add	Subtract
0.005 volt per cell for every 1°C below 25°C 0.0028 volt per cell for every 1°F below 77°F	0.005 volt per cell for every 1°C above 25°C 0.0028 volt per cell for every 1°F above 77°F


# **OPERATIONAL DATA**

Operating Temperature	Self Discharge
-4°F to 113°F (-20°C to +45°C). At temperatures below 32°F (0°C) maintain a state of charge greater than 60%.	5 – 15% per month depending on storage temperature conditions.

# PERCENT CAPACITY VS. TEMPERATURE

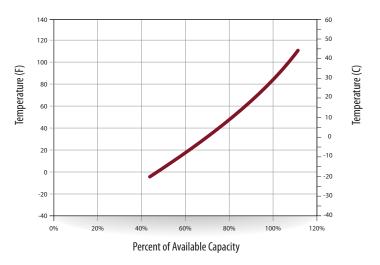

# **SELF DISCHARGE VS. TIME\***

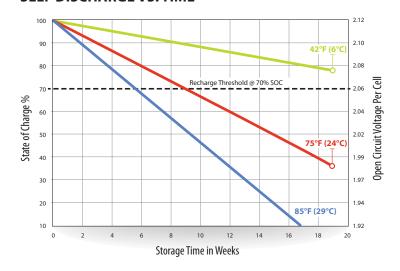

# \*PERIODIC CHARGE


#### FREQUENCY


Provide a periodic freshening charge to maintain a SOC greater than the threshold of 70%.


# **STATE OF CHARGE** MEASURE OF OPEN-CIRCUIT VOLTAGE


Percentage Charge	Specific Gravity	Cell	12-Volt
100	1.277	2.122	12.73
90	1.258	2.103	12.62
80	1.238	2.083	12.50
70	1.217	2.062	12.37
60	1.195	2.040	12.24
50	1.172	2.017	12.10
40	1.148	1.993	11.96
30	1.124	1.969	11.81
20	1.098	1.943	11.66
10	1.073	1.918	11.51

## **DOD VS CYCLE LIFE IN A STATIONARY APPLICATION**

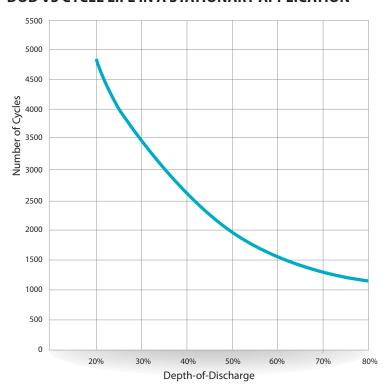







# **TERMINAL CONFIGURATIONS**

6	DT	Automotive Post & Stud Terminal
		Terminal Height Inches (mm) 1.10 (28)
		<b>Torque Values: in-lb (Nm)</b> Stud: 95 – 105 (11 – 12) / AP: 50 – 70 (6 – 8)
		<b>Bolt Size</b> 5/16"-18

## **EXPECTED LIFE VS. TEMPERATURE**

Chemical reactions internal to the battery are driven by voltage and temperature. The higher the battery temperature, the faster chemical reactions will occur. While higher temperatures can provide improved discharge performance the increased rate of chemical reactions will result in a corresponding loss of battery life. As a rule of thumb, for every 10°C increase in temperature the reaction rate doubles. Thus, a month of operation at 35°C is equivalent in battery life to two months at 25°C. Heat is an enemy of all lead acid batteries, FLA, AGM and gel alike and even small increases in temperature will have a major influence on battery life.

## **SMART CARBON™**

Deep-cycle batteries used in off-grid and unstable grid applications are heavily cycled at partial state of charge (PSOC). Operating at PSOC on a regular basis can quickly diminish the overall life of a battery, which results in frequent and costly battery replacements. To address the impact of PSOC on deep-cycle batteries in renewable energy (RE), inverter backup and telecom applications, Trojan Battery has now included Smart Carbon™ as a standard feature in its Solar Industrial and Solar Premium flooded battery lines.



A. The amount of amp-hours (Ah) a battery can deliver when discharged at a constant rate at 86°F (30°C) and maintain a voltage above

B. Dimensions may vary depending on type of handle or terminal. Batteries should be mounted with 0.5 inches (12.7 mm) spacing minimum.

C. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.